

Zebra AN480 Wide-Band RFID Antenna

High-performance, wide-band antenna for worldwide use

The AN480 single port antenna offers maximum performance and flexibility. The low axial ratio is nearly 50 percent lower than typical competitive devices, delivering a more uniform gain—and better performance. The wide frequency range enables this antenna to be utilized in worldwide deployments providing cost-efficiencies and a simplified RFID infrastructure. The AN480 can be installed throughout the enterprise in manufacturing and warehouse floor environments, or any dock door receiving application. As with all Zebra antennas, the AN480 uses Zebra's standard mounting bracket. Mounting the antenna for the first time or upgrading an existing Zebra antenna with the AN480 is fast and easy.



AN480 Specifications

PHYSICAL CHARACTERISTICS	
Polarization	Left-hand circular or right-hand circular
Dimensions	259.1 mm x 259.1 mm x 33.5 mm/ 10.2 in. x 10.2 in. x 1.32 in.
Connector	N-Type Female
Connector Location	Rear
Mounting Options	Mounting studs provided
Weight	1.13 kg/2.5 lbs
Casing/Materials	Aluminum with white plastic cover
Frequency Ranges	865–956 MHz
VSWR (Return Loss)	1.3:1


Gain	6.0 dBiL
Front to Back Ratio	18 dB
3 dB Beam Width	65° in both planes
Maximum Power	2 Watts
Axial Ratio	1.5 dB typical
Operating Temperature	-25° to +70°C/-13° to +158°F
Storage Temperature	-40° to +70°C/-40° to +158°F
IP Sealing	IP54
Vibration	IEC-68 series
Humidity	IEC-68-2-30

Vertical Markets


- Retail
- Enterprise/Office
- Hospitality
- Healthcare

Applications


- Point of sale
- Control points
- Hallways

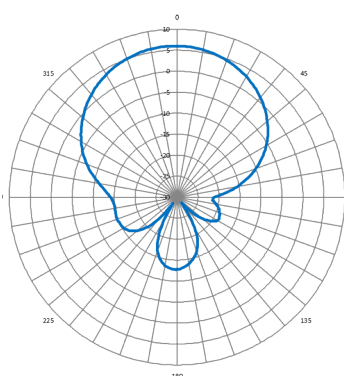


Horizontal (FCC)

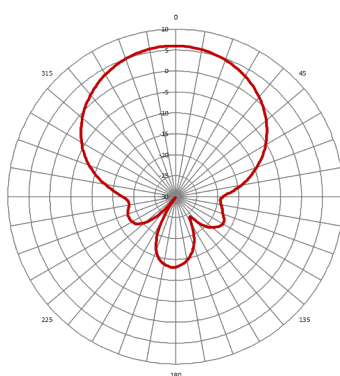

Vertical (FCC)

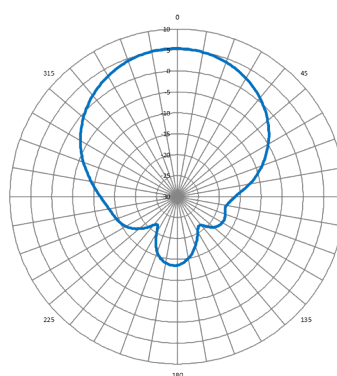

Horizontal (ETSI)

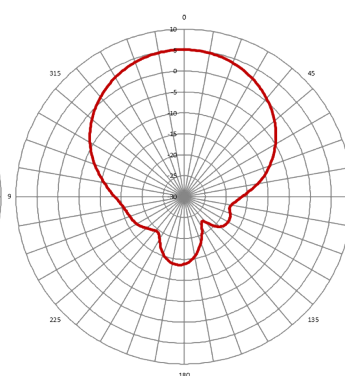

Vertical (ETSI)